



Australian Government
National Capital Authority

DEVELOPMENT CONTROL PLAN

NATIONAL CAPITAL PLAN
DEVELOPMENT CONTROL PLAN NO: 11/01
BLOCK 6 SECTION 25 GRIFFITH
JULY 2011

APPROVED

.....
Chief Executive

Date 29/07/11

BLOCK 6 SECTION 25
GRIFFITH



NATIONAL CAPITAL AUTHORITY © 2011

Apart from any use as permitted under the Copyright Act 1968,
no part may be reproduced by any process without written
permission from the National Capital Authority.

National Capital Authority
July 2011

WWW.NATIONALCAPITAL.GOV.AU/DCP

CONTENTS

DEVELOPMENT CONTROL PLAN NO: 11/01.....	5
1. PREAMBLE.....	5
2. PLANNING AND URBAN DESIGN OBJECTIVES.....	5
3. LAND USE	6
4. BUILDING MASS, HEIGHT AND ARTICULATION.....	6
5. BUILDING SETBACK, ARTICULATION AND STREET ADDRESS.....	6
6. ROOFSCAPE DESIGN.....	6
7. BUILDING MATERIALS AND COLOURS	7
8. LIGHTING.....	7
9. VEHICULAR ACCESS AND CAR PARKING.....	7
10. LANDSCAPE DESIGN	7
11. SIGNS.....	7
12. MECHANICAL PLANT & EQUIPMENT, ELECTRICAL SUBSTATIONS, STORAGE & SERVICE AREAS.....	7
13. SUSTAINABLE DEVELOPMENT.....	8
14. DCP DRAWINGS.....	8
FIGURE 1: DCP DRAWING NO:11/01 BLOCK 6 SECTION 25 GRIFFITH.....	9

APPROVED:



Chief Executive

Date 29/07/11

DEVELOPMENT CONTROL PLAN NO: 11/01

1. PREAMBLE

The subject site is adjacent to Canberra Avenue, which is a Main Avenue as defined in the National Capital Plan (the Plan). Special Requirements for Main Avenues under Section 2.3 of the Plan apply to the site and state:

Development is to conform to Development Control Plans (agreed by the National Capital Authority) which seek to secure the integrity of the Main Avenues as approaches to the Parliamentary Zone and ensure that the setting, buildings and purposes of the development enhance that function.

The provisions of this Development Control Plan (DCP) apply to Block 6 Section 25 Griffith. In the absence of a provision in the Plan to the contrary, all development should accord with the relevant provisions of the Territory Plan. Where an inconsistency arises between the Territory Plan and the National Capital Plan, the National Capital Plan prevails.

The subject area is Territory Land outside the Designated Area of the Plan and therefore the ACT Planning and Land Authority (ACTPLA) is responsible for assessing development applications relating to the subject area. In doing so, ACTPLA is required to ensure any proposal is not inconsistent with this DCP or the Plan.

The Canberra Avenue road reservation forms part of the Designated Areas of the Plan and therefore the National Capital Authority (NCA) is responsible for granting works approval within the Canberra Avenue road reservation.

2. PLANNING AND URBAN DESIGN OBJECTIVES

- > Enhance the character of Canberra Avenue as one of Griffin's Main Avenues and as one of the main approaches to Parliament House and the Parliamentary Zone.
- > Maintain and reinforce the character of Canberra Avenue as a setting for prestigious buildings.
- > Allow for buildings with appropriate urban scale relationship to Canberra Avenue and the final approach to the Parliamentary Zone.
- > Ensure that a high level of amenity is provided in site layout and urban design and that noise impacts are mitigated through appropriate building design, materials and construction.
- > Architectural design and construction should exhibit design excellence in urban design, architecture and landscape, and demonstrate sustainable features using a palette of high quality and durable materials.
- > Encourage modulation, tactility, silhouette and human scale in relation to built form and streetscape design.
- > Ensure all new buildings addressing Canberra Avenue have their main frontage to Canberra Avenue with a clearly articulated entry.

APPROVED:  Date 29/07/11
Chief Executive

3. LAND USE

- 3.1** Land use on Block 6 Section 25 Griffith shall be consistent with the land use of the National Capital Plan, and the land use of the Territory Plan.

4. BUILDING MASS, HEIGHT AND ARTICULATION

- 4.1** Buildings and other permanent structures should be designed to a high architectural design standard and must ensure an overall consistency in form, massing and detail.
- 4.2** DCP Drawing No. 11/01 illustrates maximum permitted building heights across the site.
- 4.3** Rooftop plant shall be an integral part of the overall design and consistent with the requirements of Section 6 'Roofscape Design' of this DCP.
- 4.4** Overlooking of adjoining properties must be mitigated through building and landscape design. The design of the upper building levels must incorporate measures to protect the amenity and privacy of adjacent development.

5. BUILDING SETBACK, ARTICULATION AND STREET ADDRESS

- 5.1** Buildings or significant structures are to be setback in accordance with the requirements set out in DCP Drawing No. 11/01.
- 5.2** Buildings are to be setback a minimum of ten (10) metres from Canberra Avenue. Encroachments of articulation elements may be permitted within the 'articulation zone' as defined in DCP Drawing No. 11/01. Articulation elements shall not occupy more than a 25 per cent footprint of the defined articulation zone. The articulation zone will commence no lower than RL579. Articulation elements may include verandahs, balconies, porches, awnings, shade devices, pergolas, bay windows, dwelling entries, and roof elements.
- 5.3** Buildings are to address street frontages as shown in DCP Drawing No. 11/01.
- 5.4** The primary address frontage for development on Block 6 Section 25 Griffith is to be oriented to Canberra Avenue to reinforce the prestige and visual interest of the avenue. Building frontages to Canberra Avenue and Leichardt Street shall be articulated incorporating modulated form, tactility, silhouette and respond to human scale. Building entries should be appropriate to the scale and character of the avenue.
- 5.5** Buildings shall have a maximum unarticulated length of 15 metres. Articulation may be provided by:
- » changes in wall planes of a minimum one (1) metre in depth and no less than four (4) metres in length; and/or
 - » inclusion of balconies; and/or
 - » horizontally stepping facades by at least one (1) metre.

6. ROOFSCAPE DESIGN

- 6.1** Careful consideration is to be given to the roof form and the roofscape of buildings as viewed from Canberra Avenue.
- 6.2** Roof top plant and equipment, if required, must be enclosed and the enclosure are to be carefully integrated with the roof form and design of the building. All such plant and equipment shall be totally concealed from view from Canberra Avenue and Parliament House.

APPROVED:



Chief Executive

Date 29/07/11

7. BUILDING MATERIALS AND COLOURS

- 7.1** The facades and roof of buildings are to be constructed of high quality, durable materials. Highly reflective external materials are not permitted.
- 7.2** Building materials, construction and finishes are to be responsive to microclimate issues. Use of sunscreen devices as articulation elements may be employed to achieve climate responsive facades.

8. LIGHTING

- 8.1** All outdoor lighting, including security and car park lighting, shall be designed and sited to minimise light pollution. Outdoor lighting shall use full cut-off light fittings. Any up-lighting of buildings should be carefully designed to keep night time overspill and glare to a minimum.

9. VEHICULAR ACCESS AND CAR PARKING

- 9.1** Access point location(s) will be determined or agreed by the relevant approval authorities.
- 9.2** A traffic and parking assessment should accompany development proposals for the site, and this will be determined in consultation with the approving authority.
- 9.3** Car parking is to be provided as required under the Territory Plan (ACT Parking and Vehicular Access General Code).
- 9.4** The visual impact of surface car parking must be minimised through adequate screening and landscape treatment that appropriately considers view lines and safety.

10. LANDSCAPE DESIGN

- 10.1** A high standard of landscape design and verge treatment is required for all road frontages. The existing avenue planting pattern along Canberra Avenue shall be maintained and reinforced.
- 10.2** A Landscape Plan must accompany any development proposal, which achieves the requirements of Section 9 'Landscape Design' of this DCP. Mature trees should be retained to the maximum extent practicable and integrated into the landscape design. Where existing trees must be removed, they must be compensated by planting elsewhere on the site.
- 10.3** A tree assessment for all verge trees must accompany any development proposal. Trees recommended for removal from the tree assessment shall be replaced with a similar species consistent with the existing avenue plantings along Canberra Avenue. Where there are gaps in the existing avenue planting, new specimens of the same species to those existing on Canberra Avenue shall be planted, in accordance with the "indicative planting" shown in DCP Drawing 11/10.

11. SIGNS

- 11.1** All signage to be integrated with building design and landscape and is to be of a high design quality.
- 11.2** All building or free-standing signs proposed on site are to be consistent with the relevant signs policies of the Territory Plan and the National Capital Plan. Where an inconsistency arises between the policies of the two plans, the National Capital Plan policies shall prevail.

APPROVED:  Date 29/07/11
Chief Executive

12. MECHANICAL PLANT & EQUIPMENT, ELECTRICAL SUBSTATIONS, STORAGE & SERVICE AREAS

- 12.1** All mechanical plant and equipment (including air conditioning units) is to be contained within buildings or located within service enclosures. Such elements, in addition to electrical substation, storage and service areas (including storage sheds), are to be carefully sited and must not be visible from Canberra Avenue or Leichardt Street.

13. SUSTAINABLE DEVELOPMENT

- 13.1** Development proposals will demonstrate a high level of performance in terms of environmental design where applicable including energy efficiency, climate management and water sensitive urban design.

14. DCP DRAWINGS


- 14.1** The above provisions should be read in conjunction with the DCP Drawing No: 11/01 which form part of this Draft DCP.

APPROVED:

Chief Executive

Date 29/07/11

FIGURE 1: DCP DRAWING NO:11/01 BLOCK 6 SECTION 25 GRIFFITH

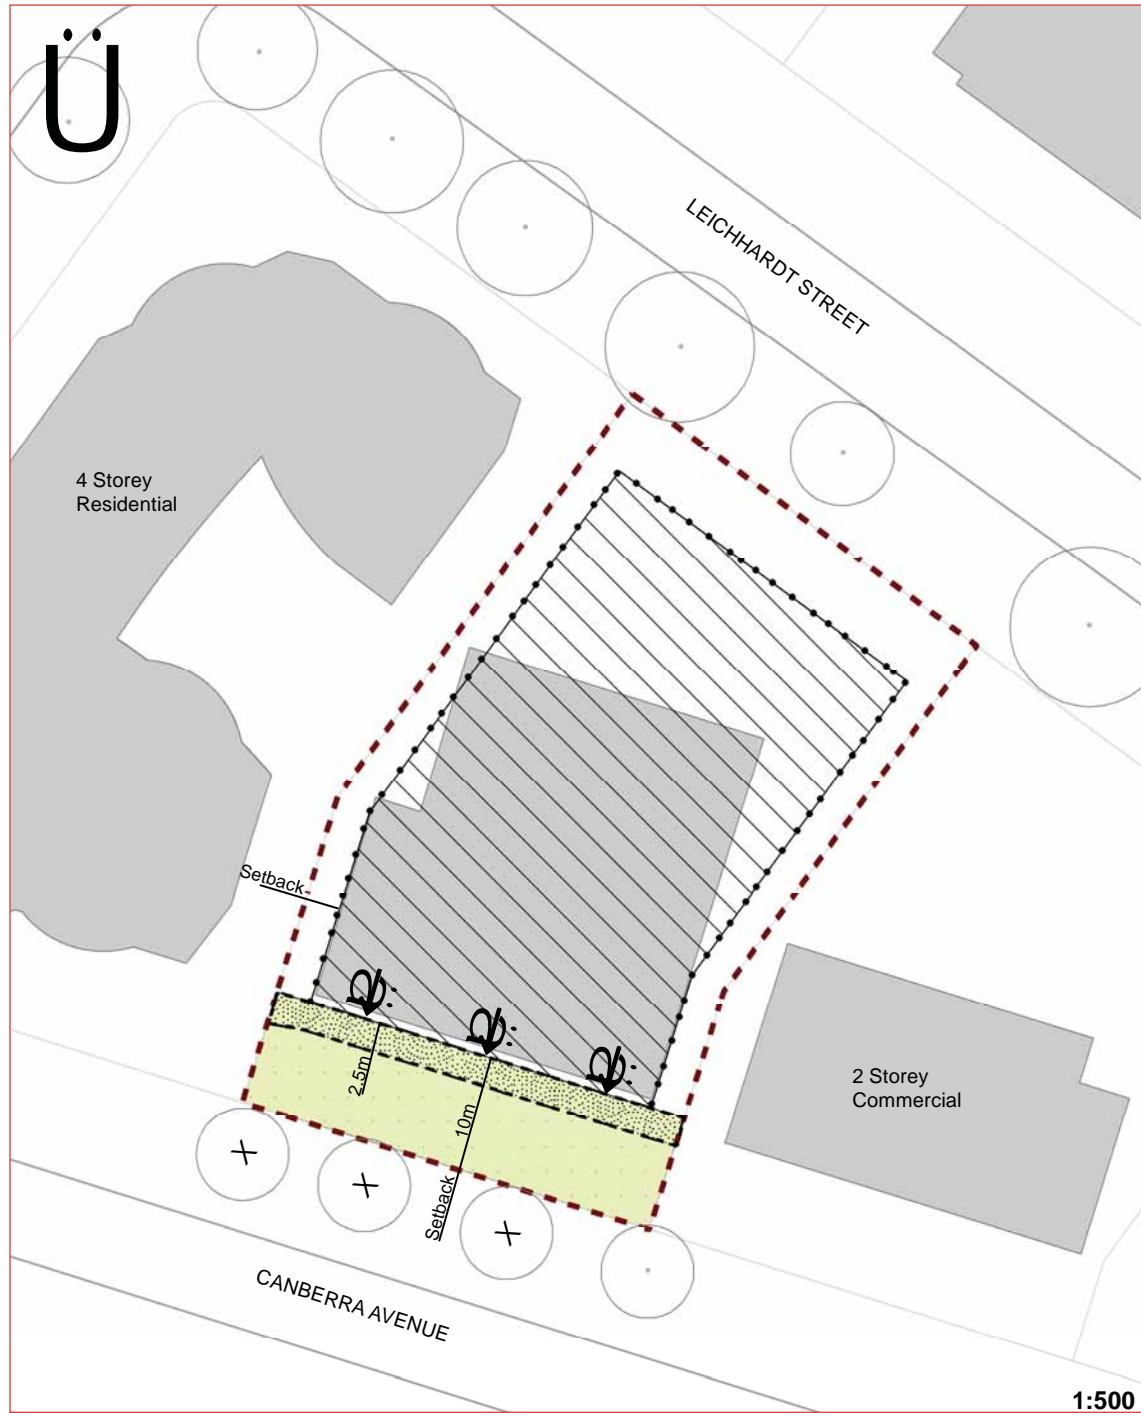

- | | | | | | | | |
|--|--|--|--------------------------|--|---------------------|--|---|
| | Area Subject to DCP | | Landsaped Zone. | | Existing Planting | | Existing Buildings |
| | Permissible Building Area.
Maximum Building Height
RL 591 (subject to
provisions in this DCP) | | Articulation Zone (2.5m) | | Indicative Planting | | Setbacks in Accordance
with Territory Plan |
| | Primary Building Facade
to Address Street | | | | | | |

APPROVED:  Date 29/07/11
Chief Executive



Australian Government
National Capital Authority

The National Capital Authority was established under the
Australian Capital Territory (Planning and Land Management) Act 1988

NATIONAL CAPITAL AUTHORITY

GPO Box 373, Canberra ACT 2601

Telephone: +61 2 6271 2888 **Facsimile:** +61 2 6273 4427

Email: natcap@natcap.gov.au

WWW.NATIONALCAPITAL.GOV.AU